


LOW NO_x STAGED AIR BURNER

GB Series



BURNERS | FLARES | THERMAL OXIDIZERS | VAPOR CONTROL | RENTALS | AFTERMARKET

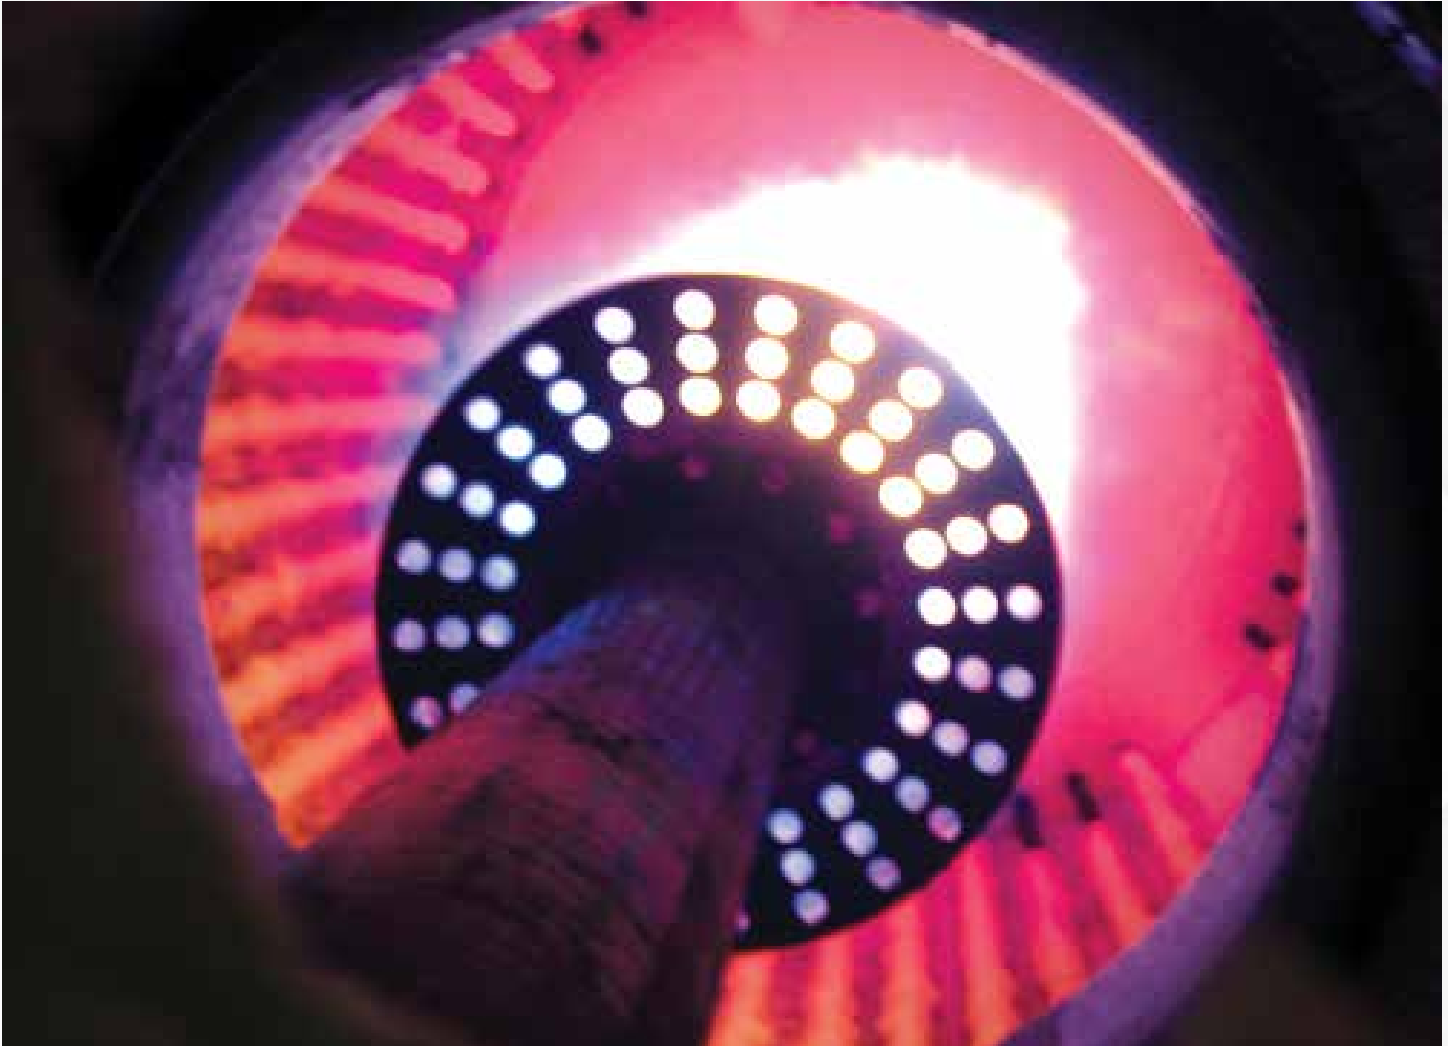

GB Staged Air Burner

Description


The ZEECO® GB staged air/staged fuel burner is designed with a staged fuel gas tip and a staged air annulus, which utilizes only one gas tip and provides lower NO_x emissions than conventional raw gas designs. With greater flame stability, the burner provides consistent heat distribution and reduces maintenance costs. This staged air method is designed to offer turndown of 10:1 or greater, which is a drastic improvement over other low NO_x designs.

Technology

The GB burner utilizes one tip to produce the primary combustion zone and the secondary combustion zone, which produces inert products of combustion that are induced into the staged fuel gas ejected straight up from the center of the gas tip. These products are then induced into the staged fuel gas ejected straight up from the center of the gas tip. Used in conjunction with staged air, a true staged fuel and staged air effect is achieved. The use of one tip allows for lower NO_x production, vastly increased flame stability, and much greater turndown.

Design Features

- Stable flame over a wide range of conditions
- Turndown of 10:1 or greater for most cases
- Compact flame shape
- Reasonable cost and great value
- Combustion air is controlled by gears for precise control
- Bearings are used for the combustion air dampers for smooth, precise operation
- Configurations available: plenum mounted or individual windbox
- One (1) primary gas tip with staged fuel gas port
- 316 Stainless Steel (Type HK) gas tips
- Staged air annulus around burner tile assembly

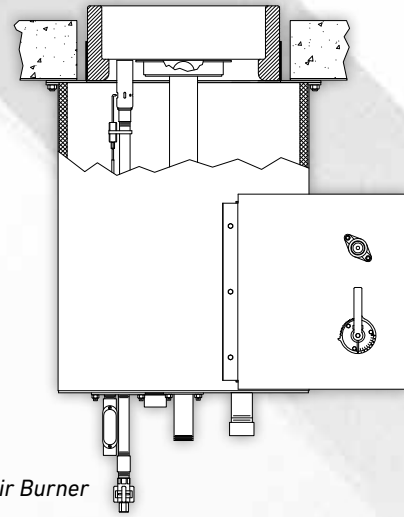

GB Staged Air Burner

Design Information

Burner Model	GB Staged Air Burner
Fuels	Gas Only
Description	Staged Air, Round Flame Burner
NOx Reduction Method	Staged Air
Predicted NOx Emissions Range (Natural Draft)	35 to 70 ppmv
Predicted NOx Emissions Range (600° F Air Preheat)	50 to 90 ppmv
Combustion Air Induction	Natural, Forced, Induced, & Balanced Draft
Mounting Options	Up-fired, Side-fired, and Down-fired
Natural Draft Heat Release Range	1 to 20 MMBtu/hr [0.293 to 5.860 MW]
Forced Draft Heat Release Range	1 to 50 MMBtu/hr [0.293 to 14.650 MW]
Turndown	10:1
Typical Excess Air Range	10 to 25%

The Zeeco Difference



Our only business is the combustion business. By concentrating on what we do best, Zeeco has grown into a worldwide leader in combustion solutions. We are a privately held company whose ownership stays highly involved in daily operations, with upper management comprised of the world's leading combustion experts.

When you call Zeeco, we answer. When you make a request, you get a quick, efficient response. We are lean and efficient, able to make decisions quickly, without bureaucracy and red tape. Our sales, engineering, and purchasing groups work hand-in-hand to deliver highly competitive quotes and heroic turnaround times. We stand ready and willing to travel anywhere in the world to discuss upcoming projects firsthand, and to ensure that every existing project runs seamlessly.

Zeeco Headquarters
22151 East 91st Street
Broken Arrow, OK 74014

Learn more at zeeco.com

✉ sales@zeeco.com

☎ +1 (918) 258 8551

Certifications apply to Zeeco Headquarters.



Visit zeeco.com/contact
for additional Global Location
contact information



GO 
ZEECO®

Choose to work with our dedicated, flexible, and innovative team, and you won't be disappointed. Call or email us today to request a quote or to learn more about our proprietary combustion systems.